KOHLER®

COMPOSED

FREE-STANDING BATH FILLER WITH HANDSHOWER

K-73087X-4

Features

- *Brass construction*
- *Leak-free ceramic disc valve with lifetime warranty*
- *Durable KOHLER finishes resist corrosion and tarnishing*
- *Directionally adjustable, laminar-flow aerator*
- *Includes 2-function handshower and diverter*
- *210 mm spout reach*
- *Lever handle*
- *Separate mounting base facilitates installation (sold separately)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *TIS 2066-2552*
- *GB 18145-2014*
- *EN 817-2008*

Installation Notes

Install this product according to the installation guide.

Specified Model

Model	Description	Color/Finished	
K-73087-4	Composed free-standing bath filler with handshower	☐ CP: Polished Chrome	☐ Others

Required Accessories		Color/Finished
K-97339	Free-standing bath filler mounting base	NA: Not Applicable

For a full range of color finishes in your market please contact your local Kohler representative

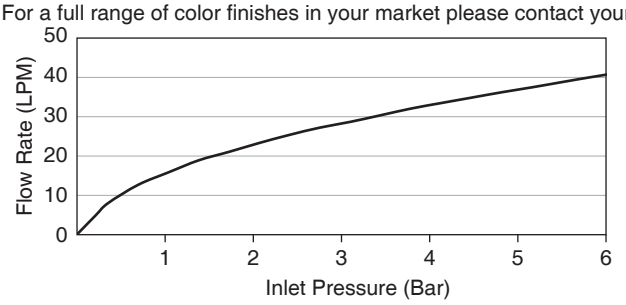

Flow Curve Bath Spout

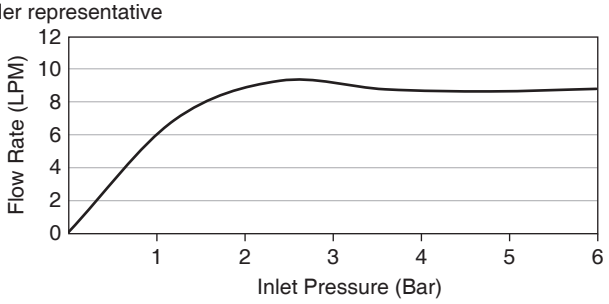

Flow Curve Handshower

Note: Flow rates are approximate. (1 gallon = 3.785 liters, 1 bar = 14.5 psi)

Dimensions are approximate.
Unit: mm

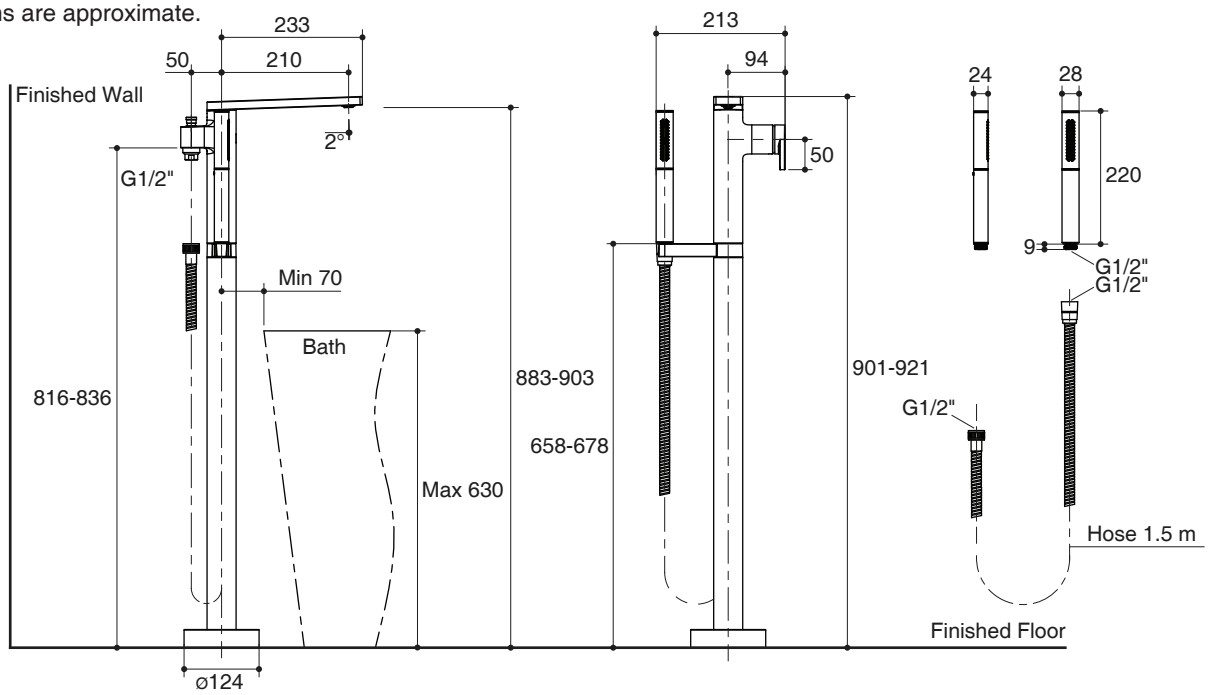

Note: The recommended dimension for installation can be adjusted according to user preferences and layout.

Product Diagram

KOHLER®

คอมโพส

ก๊อกผสมลงอ่างอาบน้ำแบบตั้งพื้น พร้อมฝักบัวสายอ่อน
K-73087X-4

คุณลักษณะ
- *ผลิตจากทองเหลือง*
- *เซรามิกวาล์วป้องกันการรั่วซึม รับประกันตลอดอายุการใช้งาน*
- *วัสดุเคลือบผิวพิเศษของโคห์เลอร์ คงทน เงางาม*
- *ปากก๊อกปรับทิศทางได้ สายน้ำสัมผัสอ่อนนุ่ม*
- *พร้อมหัวฝักบัวปรับสายน้ำได้ 2 ระดับ และตัวปรับทางน้ำ*
- *ระยะจากกึ่งกลางตัวก๊อกถึงกึ่งกลางปากก๊อก 210 มม.*
- *มือบิดแบบก้านโยก*
- *ติดตั้งผลิตภัณฑ์คู่กับฐานติดตั้งก๊อกผสมลงอ่างอาบน้ำแบบตั้งพื้น (แยกจำหน่าย)*

มาตรฐาน
คุณสมบัติตามมาตรฐาน
- *มอก. 2066-2552*
- *GB 18145-2014*
- *EN 817-2008*

ข้อสังเกตสำหรับการติดตั้ง
ติดตั้งผลิตภัณฑ์โดยใช้คู่มือแนะนำการติดตั้ง

รุ่นผลิตภัณฑ์

รุ่น	ชื่อผลิตภัณฑ์	สี/วัสดุเคลือบผิว	
K-73087X-4	ก๊อกผสมลงอ่างอาบน้ำแบบตั้งพื้นพร้อมฝักบัวสายอ่อน รุ่นคอมโพส	☐ CP: สีโครมเงา	☐ อื่นๆ

อุปกรณ์ที่จำเป็น		สี/วัสดุเคลือบผิว
K-97339	ฐานติดตั้งก๊อกผสมลงอ่างอาบน้ำแบบตั้งพื้น	NA: สีตามชนิดวัสดุ

ตรวจสอบ สี/วัสดุเคลือบผิวผลิตภัณฑ์จากตัวแทนจำหน่ายโคห์เลอร์ในประเทศของท่าน

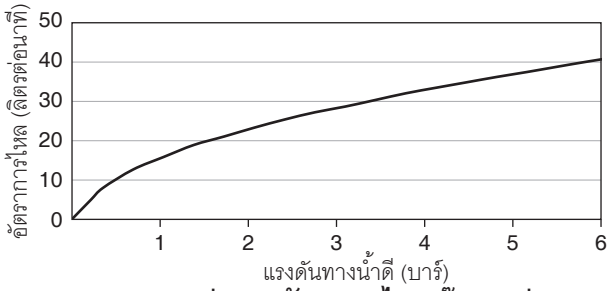

กราฟแสดงอัตราการไหล ก๊อกลงอ่าง

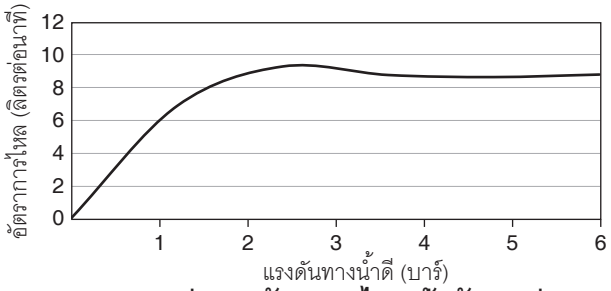

กราฟแสดงอัตราการไหล ฝักบัวสายอ่อน

หมายเหตุ: อัตราการไหลค่าโดยประมาณ (1 แกลลอน = 3.785 ลิตร, 1 บาร์ = 14.5 ปอนด์ต่อตารางนิ้ว)

ขนาดระยะแสดงค่าโดยประมาณ
หน่วย: มม.

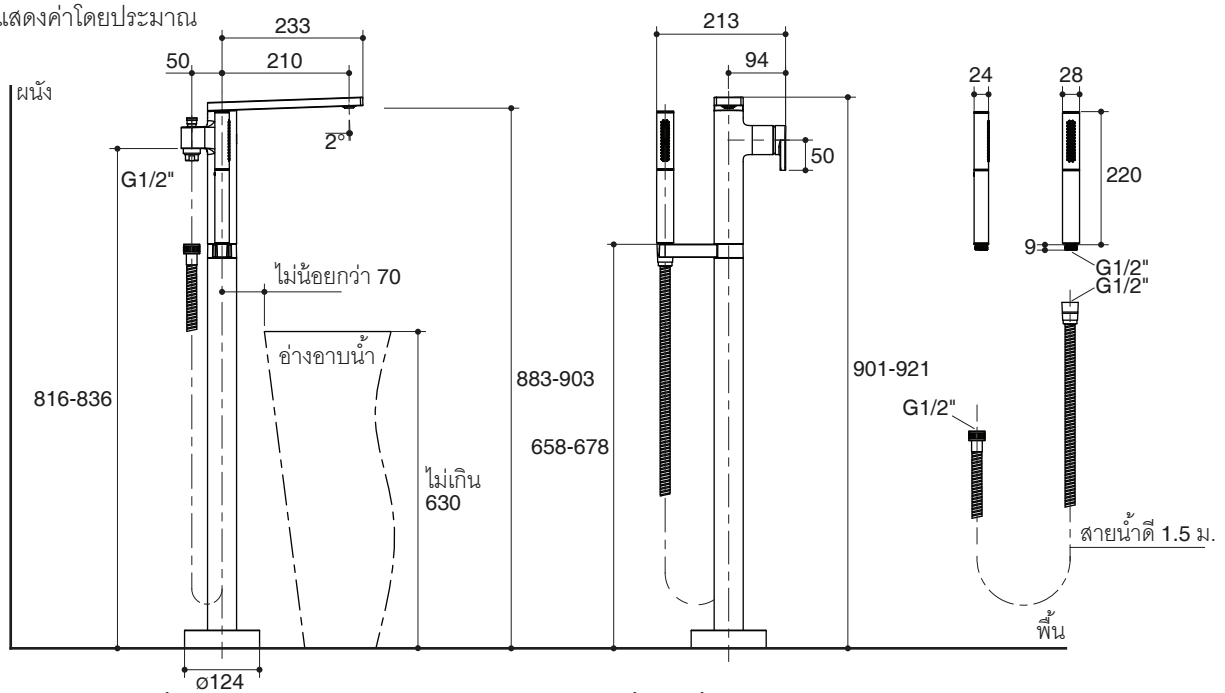

หมายเหตุ: ระยะแนะนำการติดตั้งสามารถปรับได้ตามความเหมาะสมของผู้ใช้งานและพื้นที่ติดตั้ง

ภาพแสดงผลิตภัณฑ์

ลูกค้าสัมพันธ์: 0-2204-6222
KOHLER.ASIA